



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

REC'D 22 DEC 2004

WIPO

PCT

09 DEC. 2004

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

IB/G4/52644

Patentanmeldung Nr. Patent application No. Demande de brevet n°

03104781.4

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk

BEST AVAILABLE COPY



Anmeldung Nr:
Application no.: 03104781.4
Demande no:

Anmeldetag:
Date of filing: 18.12.03
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.
Groenewoudseweg 1
5621 BA Eindhoven
PAYS-BAS
INTERUNIVERSITAIR MICROELEKTRONICA CENTRUM
VZW
Kapeldreef 75
3001 Leuven
BELGIQUE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se referer à la description.)

A semiconductor substrate with solid phase epitaxial regrowth with reduced
junction leakage and method of producing same

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)
revendiquée(s)
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

H01L29/78

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL
PT RO SE SI SK TR LI

A semiconductor substrate with solid phase epitaxial regrowth with reduced junction leakage and method of producing same

The present invention relates to a method of producing a semiconductor device in which use is made of a solid phase epitaxial regrowth technique to produce shallow junctions.

5

The technique of SPER is, a.o., disclosed by US-A-6,063,682. According to this prior art document, heavy ions are implanted into a silicon substrate. The implanted heavy ions create an amorphous layer at the top surface of the substrate. The amorphous layer is free of channels. Then, a silicon implanting step is performed to create an excess of
10 vacancies to interstitials within a top layer of the substrate. Since the amorphized silicon layer is free of channels, the depth of implant is mainly restricted to this amorphized silicon layer.

One of the most promising approaches for the future generations of CMOS technology nodes is the low temperature processing. This is due to a few reasons like metal
15 gate and junction formation that require reduced thermal budget. Ultra-shallow (source and drain extensions) junctions formed by Solid Phase Epitaxial Regrowth (SPER) can be obtained with good metastable B activation, limited dopant diffusion and excellent abruptness. Typical temperatures used for the junction regrowth are between $T=550^{\circ}\text{C}$ and $T=750^{\circ}\text{C}$. Processing at these low temperatures does not remove the post-implantation
20 damage completely and therefore such junctions suffer from higher leakage current. Deep Level Transient Spectroscopy (DLTS) studies prove that the typical defects are positioned 0.457 eV below the conduction band.

However, together with high dopant activation levels in the junction and excellent abruptness of the junction a dramatic increment of band-to-band leakage current has
25 been observed.

Therefore it is an object of the present invention to provide a method of producing a semiconductor device as stated at the outset that reduces the leakage current of the junction.

To obtain this object, the present invention provides a method of producing a semiconductor device comprising:

- a) providing a semiconductor substrate
- b) making a first amorphous layer in a top layer of the semiconductor substrate by a suitable implant, the first amorphous layer having a first depth
- c) implanting a first dopant into the semiconductor substrate to provide the first amorphous layer with a first doping profile
- d) applying a first solid phase epitaxial regrowth action to partially regrow the first amorphous layer and render a second amorphous layer having a second depth that is less than the first depth and activate the first dopant
- e) implanting a second dopant into the semiconductor substrate to provide the second amorphous layer with a second doping profile with a higher doping concentration than the first doping profile
- f) applying a second solid phase epitaxial regrowth action to regrow the second amorphous layer and activate the second dopant

By this method, a semiconductor substrate is provided that has two shallow areas close to the surface of the substrate. A first area that is located adjacent to the top surface of the substrate has a higher doping level than the second area that is adjacent to the first area and extends into the substrate. This second area can be made even more shallow than the first area. For instance, the first area adjacent to the surface can have a thickness of 6-12 nm, whereas the second area may have a thickness of 2-4 nm. Due to the differences in doping levels, the leakage current from the first area across the junction can be reduced efficiently.

According to an embodiment of the present invention the method includes, prior to the action b), implanting an initial dopant to provide a HALO implant area extending deeper than the first amorphous layer.

In a further embodiment the present invention relates to a semiconductor device made by a solid phase epitaxial regrowth technique, comprising a semiconductor substrate with a first area with a first conductivity profile and a second area with a second conductivity profile, the second area having a thickness of 6-12 nm and being located adjacent to a top surface of the semiconductor substrate, and the first area having a thickness

of 2-4 nm and being located adjacent to the second area, the second conductivity profile having a lower conductivity than the first conductivity profile.

Moreover, the invention relates to a metal oxide semiconductor device comprising such a device.

5 Finally, the invention relates to an apparatus provided with such a semiconductor device.

Now, the present invention will be illustrated with reference to some drawings, which are only intended to illustrate the present invention and not to limit its scope. The scope is only limited by the definition of the claims as annexed to this description, and its
10 technical equivalents.

Figs. 1a-1f show different stages of producing a semiconductor device in accordance with the present invention.

15 Fig. 2 shows an example of a dopant concentration and a conductivity profile as a function of depth in a semiconductor substrate in accordance with a method known from the prior art.

Fig. 3 shows an example of dopant concentrations and a conductivity profile as a function of depth in a semiconductor substrate in accordance with the invention.

20

In the description to follow, same reference numbers refer to same elements in all figures. Figures 1a-1f refer to producing a metal oxide semiconductor device in which the present invention is used. However, as will be evident to a person skilled in the art, the
25 inventive features may be applied in the production of any other type of semiconductor device where shallow junctions are desired.

Figure 1a shows a semiconductor substrate 1 of a p-type. Field oxide regions 3 are provided on a top surface of the semiconductor substrate 1. At certain locations, a thin oxide layer 5 is provided by a technique known to a person skilled in the art. The thin oxide
30 layer 5 can later be used as the gate oxide layer within the MOS device to be produced. However, the present invention is not restricted to the application of a thin oxide layer 5 to obtain the desired effect as will become clear from the description below.

The structure of figure 1a is provided with a suitable photo resist layer 30 having an opening above the thin oxide layer 5. Then, an implanting action is performed to produce an n-well 11 within the substrate 1.

5 The thin oxide layer 5 may be removed and be substituted by a new, fresh oxide layer to be later on used as the gate oxide layer in the MOS device to be produced. However, here it is assumed that the thin oxide layer 5 remains in place. As shown in figure 1c, on top of the thin oxide layer 5, a polysilicon layer 13 is provided, later to be used as the gate of the MOS device to be produced.

10 An amorphization implant 15 is performed to produce an amorphous layer in the top of the substrate 1. The depth of the implant that defines the depth of the amorphous layer is indicated with reference number 17. The implant 15 to produce this amorphous layer may be performed with Ge, GeF_2 or Si. However, other atoms, like indium, may be applied instead. By this implant, the channels in the silicon substrate 1 are eliminated in the amorphous layer.

15 This step of producing the amorphous layer is followed by a subsequent dopant implant, e.g., with boron (B), phosphorus (P), arsenic (As) or indium (In). Since there are no channels within the amorphous layer, the dopant implant atoms, like boron, will not penetrate substantially deeper into the silicon substrate 1 than the amorphous layer. The depth of this subsequent dopant implant is indicated with reference number 19. It is to be
20 understood that the depth of implant 19 is only slightly larger than the depth of the amorphous layer 17. The distances between the dashed line 17 and the top surface and the distance between the dashed line 19 and the top surface of substrate 1 are not on scale. They are only drawn to illustrate the principle of the present invention.

Now, reference is made to figure 2.

25 Figure 2 shows the top of the silicon substrate, the depth of the amorphous layer 17 and the depth of the implant of boron (as an example) 19. The boron profile corresponds to the boron profile as shown in prior art document US-A-6,063,682.

A next action is to apply a so called low temperature approach, i.e., a solid phase epitaxial regrowth (SPER) technique. In SPER, the silicon crystal is first pre-
30 amorphized, then doped and finally regrown at a typical temperature between 550° C and 750° C. By this temperature action, the amorphous layer is regrown and the dopant (e.g., boron) is activated. The main advantages of SPER are limited dopant diffusion (hardly beyond the amorphous layer 17) and above solid solubility dopant activation.

However, experiments have shown that the low temperature action of SPER does not remove the post-implantation damage completely. Therefore, junctions made by SPER may suffer from a higher leakage current.

5 The present invention proposes to solve this problem by the method explained with reference to figure 3.

Figure 3 shows the top area of the silicon substrate again. Figure 3 shows the depth of the amorphous layer 17 on a larger scale than figure 2.

10 The amorphous layer 17 may be produced by implanting with at least one of Ge, GeF₂, Si, Ar or Xe atoms. When Ge is used a typical energy may be between 2-30 keV and a typical dose may be 10¹⁵ atoms/cm². Other energies or doses may be used.

15 Then, the semiconductor substrate 1 is implanted with a dopant, e.g. B, with a rather low energy. When B is implanted, such a low energy may typically be between 3-10 keV. Then the dose may typically be of the order of 10¹⁴ atoms/cm². A B-doping concentration indicated with "low B-concentration" results. P, As or In may be used instead of B.

20 Then, in accordance with the present invention the amorphous layer 17 is not entirely regrown by means of a SPER technique but only partially. I.e., the SPER process applied with a temperature of typically between 550°C and 750°C is performed during a few seconds only. By this SPER process, a layer of 2-6 nm can be created with only lowly active B. Only a portion of the earlier layer 17 remains amorphous, as indicated with a dashed line 21. I.e., the substrate is regrown from dashed line 17 to dashed line 21 whereas an amorphous layer remains between dashed line 21 and the semiconductor surface. The depth from the semiconductor surface to dashed line 21 may be 6-12 nm.

25 Then, a further dopant implantation follows, e.g., again using B. The energy may typically between 0.5 and 3 keV. A typical dose may be of the order of 10¹⁵ atoms/cm². These B-atoms will, typically, not be implanted deeper than the depth of the remaining amorphous layer, i.e., until dashed line 21. P, As or In may be used instead of B.

30 Only after this action, the remaining portion of the amorphous layer 21 is regrown entirely. Again this is done by a SPER process. Again typical temperatures are between 550°C and 750°C. However, a typical time needed is of the order of 1 minute.

Thus, a top area adjacent the semiconductor surface results with two combined dopant concentrations, i.e., in a first region adjacent to the semiconductor surface there is a higher doping level than in a second region adjacent to the first region. The second region between the dashed lines 21 and 17 has a lower doping level than the first region between the

semiconductor surface and the dashed line 21. After the completion of this action, a conductivity profile results as indicated in figure 3 which has a higher conductivity in the region between the semiconductor surface and the dashed line 21 than in the region between the dashed line 21 and dashed line 17.

5 Experiments have shown that after completion of the structure shown in figure 3, the higher the activation level of the dopant in the region between dashed lines 21 and 17, the weaker the leakage reduction. E.g., a typical activation level in the region between dashed lines 21 and 17 may be 6.5×10^{19} B at/cm³. However, at the same time, investigations have shown that there is no further improvement if the width of the area between the dashed lines
10 21 and 17 exceeds 6 nm.

As will be explained below, the region between the semiconductor surface and dashed line 17 will eventually form source/drain extensions of a transistor. By the method described above, the doping of this region can still be highly activated, which makes it possible to tune the on/off current of the transistor comprising such source/drain extensions.

15 In other words, there is good control over the transistor channel region to be produced.

Now, with reference to figures 1d-1f, the completion of the semiconductor device to be produced will be explained.

As shown in figure 1d, after the SPER process, likely doped regions 18 result that will become source/drain extension regions of the MOS transistor on the substrate 1. The
20 depth of this doped regions 18 will be substantially equal to the depth of the earlier amorphous layer 17.

On top of the structure, a spacer material 21 is deposited. The spacer material 21 may be silicon dioxide. However, other spacer materials may be used, as is known to a person skilled in the art.

25 ~~The spacer material 21 is etched with a suitable etchant and such, that only~~
side spacers 23 adjacent to the polysilicon layer 13 remain. See figure 1e. This is all prior art and need no further explanation here. Note that, due to the etch process, only a portion of the thin oxide layer 5 remains, i.e., the portion below the polysilicon layer 13 and the portions below the side spacers 23. The portions of the thin oxide layer 5 elsewhere are removed by
30 the etch process.

A further ion implant action is performed as shown in figure 1f. In the embodiment shown, this is a p⁺ implant 29 to produce a p⁺ source region 27 and a p⁺ drain region 152. These source and drain regions 27, 25 extend deeper in the substrate 1 than the earlier doped regions 18. The side spacers 23 act as a mask to save portions of the earlier

doped regions 18 from this latter p^+ implant 29. Thus, extension regions 18 remain after this action.

As is known to a person skilled in the art, the manufacture of the MOS device is completed by, e.g., providing a suitable silicide process to form silicide on the drain 25, the source 27 and the polysilicon layer 13 which acts as a gate. This latter silicide process is known to a person skilled in the art and not shown in figure 1f.

As will be evident to persons skilled in the art, the present invention is not limited to the example given above.

E.g., it is not necessary, that implanting the dopant both before and after the partial regrowth of the amorphous layer is performed while an insulating layer 5 is present on the semiconductor substrate surface.

Moreover, the present invention has been illustrated with dopants with B to produce p-type extensions for source and drain regions. However, other types of dopants will be used when one wishes to produce an n-type extension. Moreover, as will be evident to persons skilled in the art, there may be HALO background areas extending deeper into the substrate 1 than the extensions 18. Figure 4 shows such HALO background areas 29 which extend deeper into the substrate 1 than the extension areas 18 but less deep than the source and drain regions 27 and 25, respectively. Such HALO regions are known to persons skilled in the art and need no further explanation here. To produce these HALO regions 29, the substrate 1 is implanted with dopants of a conductivity type opposite to the conductivity type of the dopant used to produce the extension regions 18 and 19 and the source and drain regions 27, 25. This implantation for the halo regions 29 is performed prior to producing the amorphous layer 17 shown in figure 1c and figure 3.

A desired transistor performance can be obtained by applying an optimum combination between activation levels in the extension regions 18, i.e. both in the region between the semiconductor substrate surface and the dashed line 21 and the region between the dashed lines 21 and 17, as well as the HALO regions 29 and the width of the regions shown in figure 3.

CLAIMS:

1. Method of producing a semiconductor device comprising:
 - a) providing a semiconductor substrate
 - b) making a first amorphous layer in a top layer of said semiconductor substrate by a suitable implant, said first amorphous layer having a first depth
 - 5 c) implanting a first dopant into said semiconductor substrate to provide said first amorphous layer with a first doping profile
 - d) applying a first solid phase epitaxial regrowth action to partially regrow said first amorphous layer and render a second amorphous layer having a second depth that is less than said first depth and activate said first dopant
 - 10 e) implanting a second dopant into said semiconductor substrate to provide said second amorphous layer with a second doping profile with a higher doping concentration than said first doping profile
 - f) applying a second solid phase epitaxial regrowth action to regrow said second amorphous layer and activate said second dopant
- 15 2. Method according to claim 1, wherein said semiconductor substrate is a Si substrate and action b) is performed with at least one of Ge, GeF₂, Si, Ar or Xe atoms.
3. Method according to claim 2, wherein said action b) is performed with Ge at a
20 dose of 10¹⁵ atoms/cm² and an energy of between 2 and 30 keV.
4. Method according to any of the preceding claims, wherein said action c) is performed with at least one of B, P, As and In at an energy between 3 and 10 keV, and a dose of 10¹⁴ atoms/cm².
- 25 5. Method according to claim 5, wherein action d) is performed at a temperature of 550-750 °C during a few seconds.

6. Method according to any of the preceding claims, wherein said action e) is performed with at least one of B, P, As and In at an energy between 0.5 and 3 keV, and a dose of 10^{15} atoms/cm².

5 7. Method according to any of the preceding claims, wherein prior to said action b), an initial dopant is implanted to provide a HALO implant area extending deeper than said first amorphous layer.

10 8. Semiconductor device made by a solid phase epitaxial regrowth technique, comprising a semiconductor substrate with a first area with a first conductivity profile and a second area with a second conductivity profile, the second area having a thickness of 6-12 nm and being located adjacent to a top surface of said semiconductor substrate, and said first area having a thickness of 2-6 nm and being located adjacent to said second area, said second conductivity profile having a lower conductivity than said first conductivity profile.

15

9. Metal oxide semiconductor device comprising a device as claimed in claim 8.

10. Apparatus provided with a semiconductor device as claimed in claim 8 or 9.

ABSTRACT:

Method of producing a semiconductor device in accordance with:

- a) providing a semiconductor substrate
- b) making a first amorphous layer in a top layer of the semiconductor substrate by a suitable implant, the first amorphous layer having a first depth
- 5 c) implanting a first dopant into the semiconductor substrate to provide the first amorphous layer with a first doping profile
- d) applying a first solid phase epitaxial regrowth action to partially regrow the first amorphous layer and render a second amorphous layer having a second depth that is less than the first depth and activate the first dopant
- 10 e) implanting a second dopant into the semiconductor substrate to provide the second amorphous layer with a second doping profile with a higher doping concentration than the first doping profile
- f) applying a second solid phase epitaxial regrowth action to regrow the second amorphous layer and activate the second dopant

15

fig. 3

Fig 1a

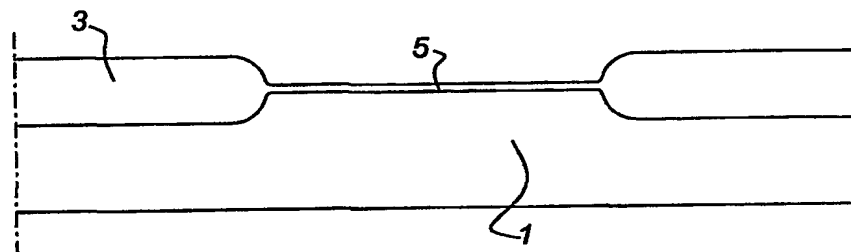


Fig 1b

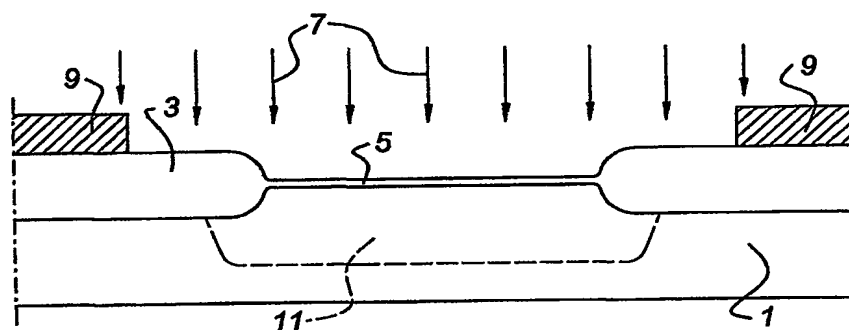


Fig 1c





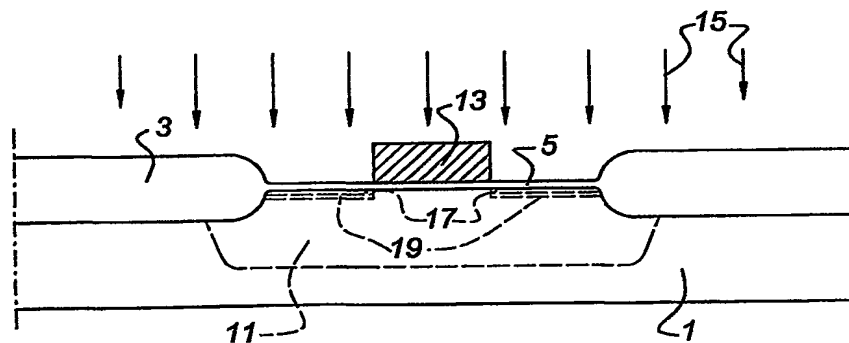


Fig 1d

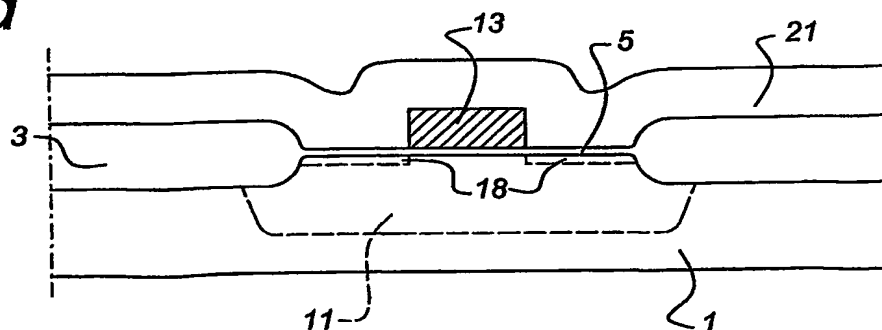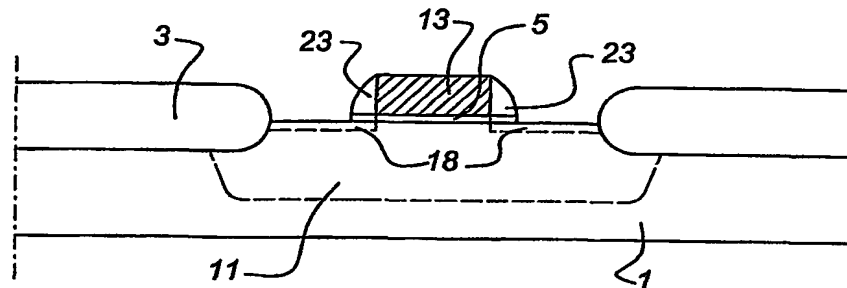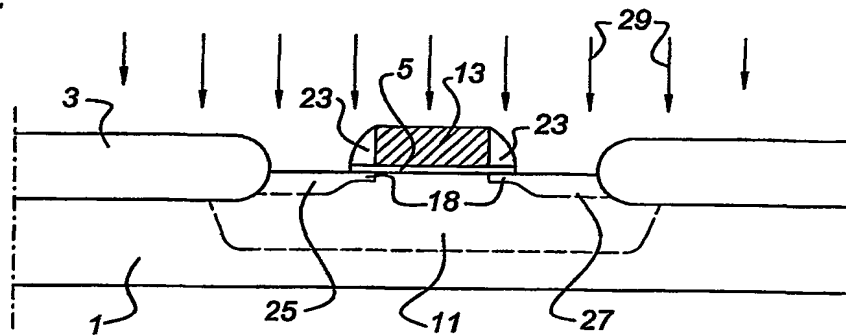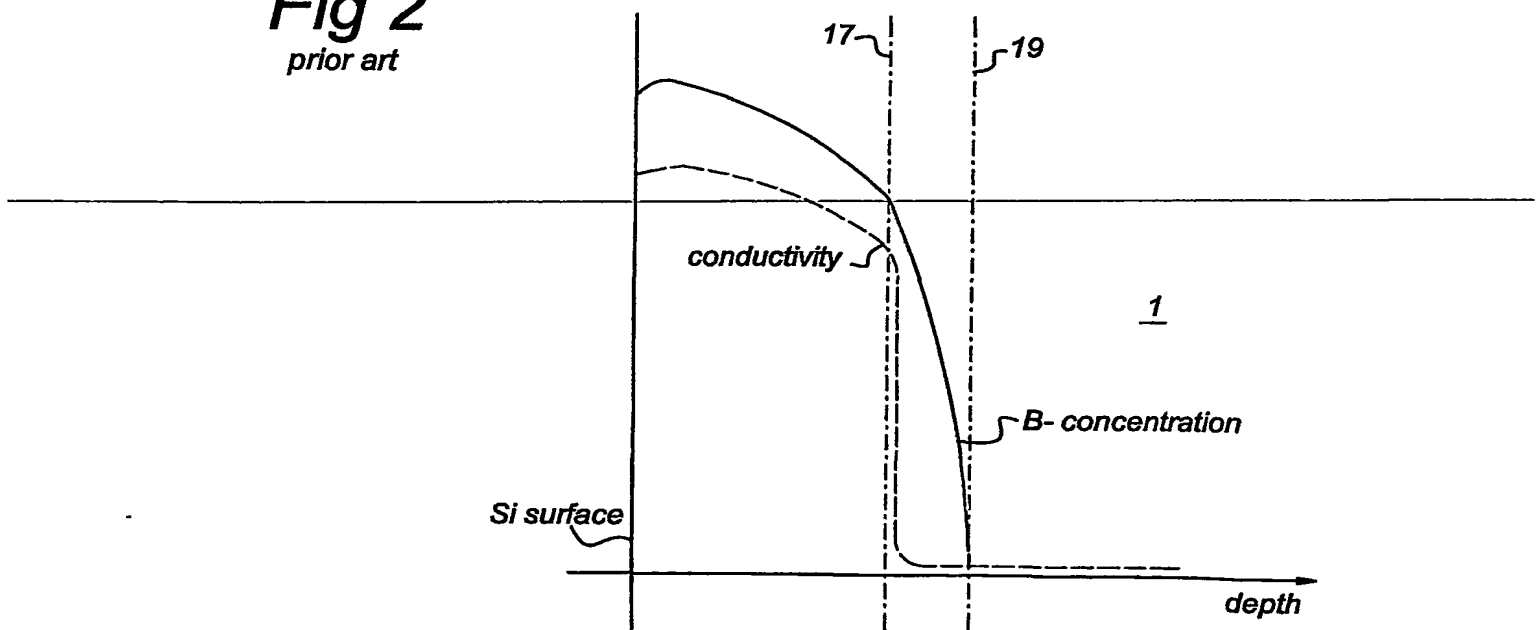

2/3

Fig 1e**Fig 1f****Fig 2**
prior art

3/3

Fig 3


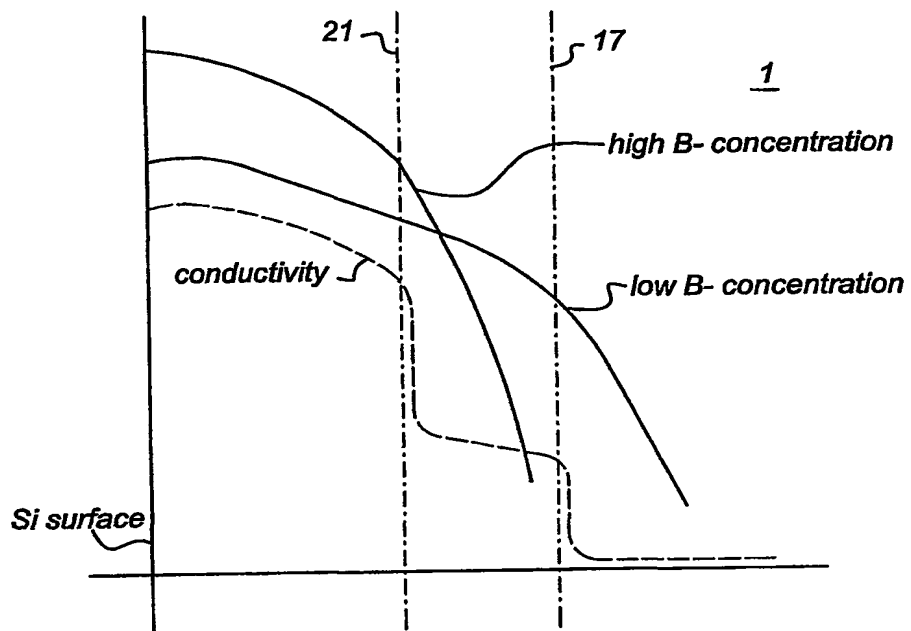


Fig 4

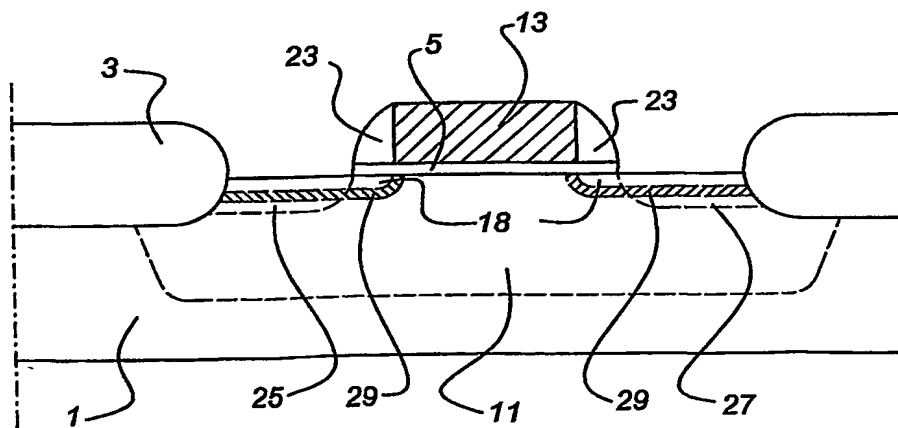

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.